


SPIRA-CEL[®] Data Sheet

- Modules for Nanofiltration -

OX-NP-8040 Series

Modules for Environmental and Industrial Applications

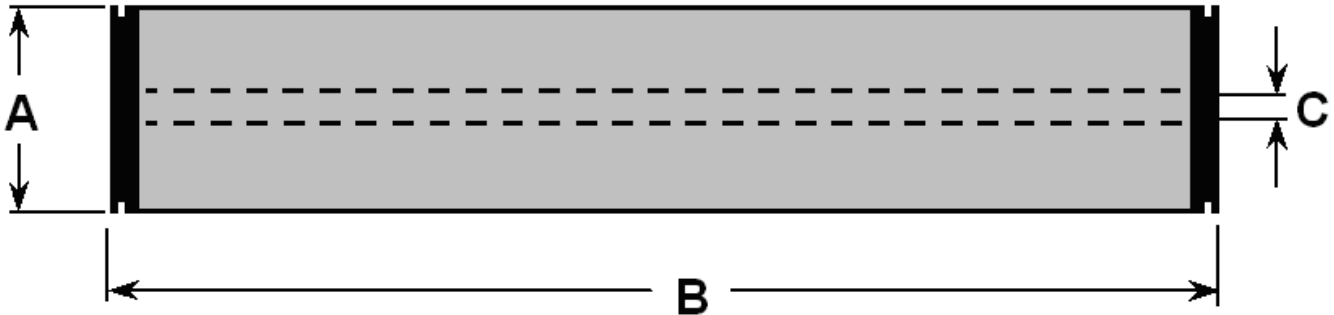

Module		A	B	C
		Ø Outside Module	Length Module	Ø Inside Permeate tube
Dimension	mm	200.5	1016	30.15
Tolerance	mm	+0 / -2	+0 / -3	± 0.1

Membrane		
NADIR [®] membrane type	NP010	NP030
Membrane material	PES	PES

Module specs & data					
Spacer type			Diamond	Diamond	Parallel
Spacer thickness		mil / mm	30 / 0.8	44 / 1.1	44 / 1.1
Membrane area		m ²	32.0	27.5	27.5
Outer wrap			Industry hard shell		

Recommended operating conditions					
Prefiltration		µm	≤ 50	≤ 75	≤ 75
Cross flow ⁽¹⁾		m ³ /h	20 - 35	25 - 40	25 - 40
Permeate pressure		bar	0	0	0

Allowable operating conditions					
Feed pressure, max.		bar	40	40	40
Retentate pressure, min.		bar	0.7	0.7	0.7
Transmembrane pressure, max.		bar	40	40	40
Permeate pressure, max.		bar	0.35	0.35	0.35
Pressure loss per module, max. (Δpmax), 5 - 50 °C		bar	2	2	2
Pressure loss per module, max. (Δpmax), 50 - 65 °C		bar	1.3	1.3	1.3
Pressure loss per module, max. (Δpmax), 65 - 80 °C		bar	0.5	0.5	0.5
Pressure loss per housing, max. at 80 °C		bar	2	2	2
Processing temperature		°C	5 - 80	5 - 80	5 - 80
pH range during filtration			3 - 14	3 - 14	3 - 14
pH range during CIP			2 - 14	2 - 14	2 - 14
Disinfection with chlorine ⁽²⁾		ppmh	35.000	35.000	35.000

¹⁾ for water at 25 °C / ⁽²⁾ at 200 ppm chlorine, 30 - 50 °C and pH > 11 for max. 30 min/day

Note:

Not all combinations are available. Please do not hesitate to contact MICRODYN-NADIR for any further information.

MICRODYN-NADIR behält sich das Recht vor, Angaben ohne vorherige Ankündigung anzupassen.
We reserve the right to change specifications without prior notification.

MICRODYN-NADIR GmbH
Industriepark Kalle-Albert
Rheingaustraße 190 – 196
D-65203 Wiesbaden

Telefon: +49 (0) 611/962-6001
Telefax: +49 (0) 611/962-9237
E-Mail: info@microdyn-nadir.de
Internet: www.microdyn-nadir.de

