



# SPIRA-CEL® OX Industry UP Series

SPIRA-CEL® OX modules have an outstandingly high stability against temperature and pH. They may be used to clean caustic solutions and may be used in biotechnological applications where extreme cleaning conditions are required. NADIR® UP polyethersulfone (PES) membranes offers consistent flux and rejection in process applications.

## Membrane Characteristics

Membrane	Nominal M.W.C.O. (Da)
NADIR® UP005	5,000
NADIR® UP010	10,000
NADIR® UP020	20,000
NADIR® UP150	150,000

Maximum Operating Pressure.....	10 bar (145 psi)
Maximum Operating Temperature.....	80°C (167°F)
Operating pH Range.....	3.0 – 14.0
Cleaning pH Range <sup>1</sup> .....	2.0 – 14.0
Maximum Pressure Drop .....	2 bar (29.0 psi) @ 5 – 50°C per element 1.3 bar (18.9 psi) @ 50 – 65°C per element 0.5 bar (7.3 psi) @ 65 – 80°C per element 2 bar (29.0 psi) @ 80°C per housing

<sup>1</sup> Refer to temperature and pH limits in *Membrane Cleaning Guide – Water Application Elements (TSG-C001)*.

## Design Information

MICRODYN-NADIR has the versatility to customize elements to meet customers' specific needs. Please contact MICRODYN-NADIR for information on customized solutions.

Model	Membrane Area m <sup>2</sup> (ft <sup>2</sup> )	Feed Spacer Thickness (mil) <sup>a</sup>
SPIRA-CEL® OX UP005 4040C	6.0 (65)	46
SPIRA-CEL® OX UP005 4040D	6.0 (65)	46
SPIRA-CEL® OX UP005 8040B	32.0 (344)	31
SPIRA-CEL® OX UP005 8040C	25.0 (269)	46
SPIRA-CEL® OX UP010 4040C	6.0 (65)	46
SPIRA-CEL® OX UP010 4040D	6.0 (65)	46
SPIRA-CEL® OX UP010 8040B	32.0 (344)	31
SPIRA-CEL® OX UP010 8040C	25.0 (269)	46
SPIRA-CEL® OX UP020 4040C	6.0 (65)	46
SPIRA-CEL® OX UP020 4040D	6.0 (65)	46
SPIRA-CEL® OX UP020 8040B	32.0 (344)	31
SPIRA-CEL® OX UP020 8040C	25.0 (269)	46
SPIRA-CEL® OX UP150 4040C	6.0 (65)	46
SPIRA-CEL® OX UP150 4040D	6.0 (65)	46
SPIRA-CEL® OX UP150 8040B	32.0 (344)	31
SPIRA-CEL® OX UP150 8040C	25.0 (269)	46

<sup>a</sup> All models on this sheet have fiberglass outer wrap and ATDs attached. Models ending in "D" have parallel feed spacers; all other models have diamond shaped feed spacers.




## Product Specification (continued)

### Physical Dimensions

Model	Element Weight kg (lbs) <sup>b</sup>	Dimensions, mm (inches)			Permeate Tube
		A	B	C <sup>c</sup>	
SPIRA-CEL® OX UP005 4040C	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP005 4040D	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP005 8040B	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP005 8040C	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP010 4040C	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP010 4040D	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP010 8040B	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP010 8040C	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP020 4040C	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP020 4040D	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP020 8040B	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP020 8040C	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP150 4040C	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP150 4040D	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP150 8040B	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP150 8040C	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female

<sup>b</sup> Shipping weight is dependent on packaging material and quantity shipped.

<sup>c</sup> Dimension "C" is the Inner Diameter.

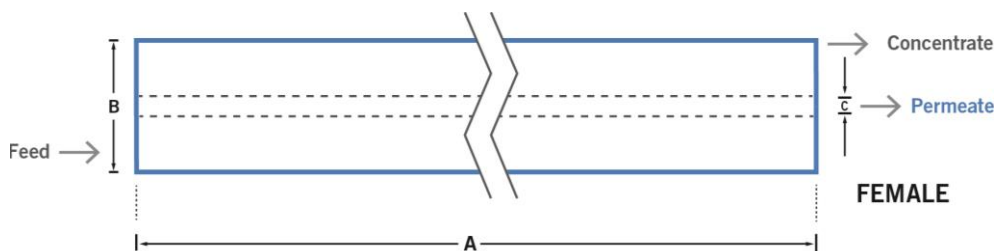

### Important Information

**Start-up:** MICRODYN-NADIR recommends flushing elements for 30 minutes at low pressure and discarding permeate during the flush prior to operation. For a more detailed start-up procedure, please see *Element Start-Up Guide – System Start-Up* (TSG-O-005).

**Cleaning:** SPIRA-CEL® membrane elements must be cleaned periodically to ensure proper operation and to prevent membrane damage. Please see *Membrane Cleaning Guide – Water Application Elements* (TSG-C001).

**Storage:** SPIRA-CEL membrane elements must be stored appropriately to ensure proper operation and to prevent membrane damage. Please see *Element Storage Guides* (TSG-O-009 & TSG-O-010).

### Customizable Specialty Elements

MICRODYN-NADIR offers a full range of membranes and element designs for challenging water and process applications. Technologies include low-fouling RO, submerged UF, continuous high temperature, ultra-high pressure, unique sanitary designs and more. Contact MICRODYN-NADIR to customize a product that satisfies your specific requirements.

## Solving Unmet Needs with Customized Products



Headquarters  
MICRODYN-NADIR GmbH  
Building D512  
Kasteler Straße 45  
65203 Wiesbaden  
Germany  
info@microdyn-nadir.de  
www.microdyn-nadir.de

USA Office  
MICRODYN-NADIR US, Inc.  
93 South La Patera Lane  
Goleta, CA 93117  
USA  
info@microdyn-nadir.com  
www.microdyn-nadir.com/en  
www.microdyn-nadir.com/triseip

China Office  
MICRODYN-NADIR (Xiamen) Co. Ltd.  
No. 66 Jinting North Road Xinglin  
Xiamen, China 361022  
infochina@microdyn-nadir.com

Singapore Office  
MICRODYN-NADIR Singapore Pte. Ltd.  
18 Tuas Avenue 8  
Singapore 639233  
info@microdyn-nadir.com