



SPIRA-CEL® OY Industry

UP Series

SPIRA-CEL® OY modules have an outstandingly high stability against temperature and pH. They may be used to clean acid solutions and may be used in biotechnological applications where extreme cleaning conditions are required. NADIR® UP polyethersulfone (PES) membranes offers consistent flux and rejection in process applications.

Membrane Characteristics

Membrane	Nominal M.W.C.O. (Da)
NADIR® UP005	5,000
NADIR® UP010	10,000
NADIR® UP020	20,000
NADIR® UP150	150,000

Maximum Operating Pressure.....	10 bar (145 psi)
Maximum Operating Temperature.....	80°C (167°F)
Operating pH Range.....	0.0 – 12.0
Cleaning pH Range ¹	0.0 – 12.0
Maximum Pressure Drop	2 bar (29.0 psi) @ 5 – 50°C per element 1.3 bar (18.9 psi) @ 50 – 65°C per element 0.5 bar (7.3 psi) @ 65 – 80°C per element 2 bar (29.0 psi) @ 80°C per housing

¹ Refer to temperature and pH limits in *Membrane Cleaning Guide – Water Application Elements (TSG-C001)*.

Design Information

MICRODYN-NADIR has the versatility to customize elements to meet customers' specific needs. Please contact MICRODYN-NADIR for information on customized solutions.

Model	Membrane Area m ² (ft ²)	Feed Spacer Thickness (mil) ^a
SPIRA-CEL® OX UP005 4040C	6.3 (68)	46
SPIRA-CEL® OX UP005 4040D	6.3 (68)	46
SPIRA-CEL® OX UP005 8040C	25.0 (269)	46
SPIRA-CEL® OX UP005 8040D	25.0 (269)	46
SPIRA-CEL® OX UP005 8040G	19.0 (205)	80
SPIRA-CEL® OX UP010 4040C	6.0 (65)	46
SPIRA-CEL® OX UP010 4040D	6.0 (65)	46
SPIRA-CEL® OX UP010 8040C	25.0 (269)	46
SPIRA-CEL® OX UP010 8040D	25.0 (269)	46
SPIRA-CEL® OX UP010 8040G	19.0 (205)	80
SPIRA-CEL® OX UP020 4040C	6.0 (65)	46
SPIRA-CEL® OX UP020 4040D	6.0 (65)	46
SPIRA-CEL® OX UP020 8040C	25.0 (269)	46
SPIRA-CEL® OX UP020 8040D	25.0 (269)	46
SPIRA-CEL® OX UP020 8040G	19.0 (205)	80
SPIRA-CEL® OX UP150 4040C	6.0 (65)	46
SPIRA-CEL® OX UP150 4040D	6.0 (65)	46
SPIRA-CEL® OX UP150 8040C	25.0 (269)	46
SPIRA-CEL® OX UP150 8040D	25.0 (269)	46
SPIRA-CEL® OX UP150 8040G	19.0 (205)	80

^a All models on this sheet have fiberglass outer wrap and ATDs attached. Models ending in "C" have diamond shaped feed spacers; all other models have parallel feed spacers.




Product Specification (continued)

Physical Dimensions

Model	Element Weight kg (lbs) ^b	Dimensions, mm (inches)			Permeate Tube
		A	B	C ^c	
SPIRA-CEL® OX UP005 4040C	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP005 4040D	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP005 8040C	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP005 8040D	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP005 8040G	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP010 4040C	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP010 4040D	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP010 8040C	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP010 8040D	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP010 8040G	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP020 4040C	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP020 4040D	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP020 8040C	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP020 8040D	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP020 8040G	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP150 4040C	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP150 4040D	4 (9)	1,016 (40.0)	101.5 (4.0)	16.0 (0.63)	Female
SPIRA-CEL® OX UP150 8040C	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP150 8040D	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female
SPIRA-CEL® OX UP150 8040G	16 (36)	1,016 (40.0)	200.5 (7.9)	30.15 (1.187)	Female

^b Shipping weight is dependent on packaging material and quantity shipped.
^c Dimension "C" is the Inner Diameter.

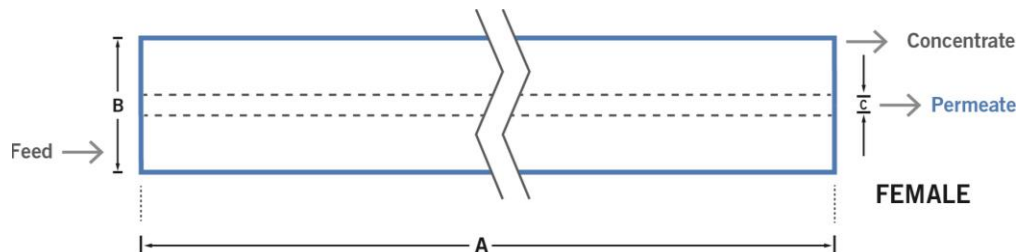

Important Information

- Start-up:** MICRODYN-NADIR recommends flushing elements for 30 minutes at low pressure and discarding permeate during the flush prior to operation. For a more detailed start-up procedure, please see *Element Start-Up Guide – System Start-Up (TSG-O-005)*.
- Cleaning:** SPIRA-CEL® membrane elements must be cleaned periodically to ensure proper operation and to prevent membrane damage. Please see *Membrane Cleaning Guide – Water Application Elements (TSG-C001)*.
- Storage:** SPIRA-CEL membrane elements must be stored appropriately to ensure proper operation and to prevent membrane damage. Please see *Element Storage Guides (TSG-O-009 & TSG-O-010)*.

Customizable Specialty Elements

MICRODYN-NADIR offers a full range of membranes and element designs for challenging water and process applications. Technologies include low-fouling RO, submerged UF, continuous high temperature, ultra-high pressure, unique sanitary designs and more. Contact MICRODYN-NADIR to customize a product that satisfies your specific requirements.

Solving Unmet Needs with Customized Products



Headquarters
 MICRODYN-NADIR GmbH
 Building D512
 Kasteler Straße 45
 65203 Wiesbaden
 Germany
 info@microdyn-nadir.de
 www.microdyn-nadir.de

USA Office
 MICRODYN-NADIR US, Inc.
 93 South La Patera Lane
 Goleta, CA 93117
 USA
 info@microdyn-nadir.com
 www.microdyn-nadir.com/en
 www.microdyn-nadir.com/triseip

China Office
 MICRODYN-NADIR (Xiamen) Co. Ltd.
 No. 66 Jinting North Road Xinglin
 Xiamen, China 361022
 infochina@microdyn-nadir.com

Singapore Office
 MICRODYN-NADIR Singapore Pte. Ltd.
 18 Tuas Avenue 8
 Singapore 639233
 info@microdyn-nadir.com