

MICRODYN BIO-CEL® XS

Submerged MBR Module for Wastewater Treatment

The MICRODYN BIO-CEL® MBR series is ideal for biological wastewater treatment in industrial and municipal applications. BIO-CEL MBR combines the benefits of traditional hollow fiber and plate and frame configurations without any of their inherent disadvantages. The module has an extremely high packing density due to the thin and self-supporting membrane sheets, and the laminate offers a self-healing mechanism

MEMBRANE CHARACTERISTICS

Membrane	NADIR® UP150
Membrane Polymer	Polyethersulfone (PES)
Nominal Pore Size	0.04 µm
Preservative	Glycerine 20 % / Sodium benzoate 3 %

MODULE SPECIFICATIONS


Housing Material Options	Polyvinyl chloride
Drainage Layer	Polyester (PET)
Diffusors Material Options	Membrane hose: Polyurethane (PUR) /Silicone (SI) Support tube: Polypropylene (PP)
Nominal Membrane Area	10 m ² (108 ft ²)

OPERATING PARAMETERS

pH Range	2.0 - 11.0
Temperature Range	5 - 40°C (41 - 104°F)
Maximum TMP during Filtration	- 400 mbar (-5.8 psi)
Maximum TMP during Regular Backwash	+150 mbar (+2.2 psi)
Recommended Air Scour Rate ^a	6 Nm ³ /h (3.5 SCFM)
Recommended MLSS in MBR Tank	8 - 12 g/L
Maximum MLSS in MBR Tank	15 g/l
Maximum Particle Size in MBR Tank	2 mm
Total Chlorine Resistance	1,000,000 ppm•hr

^a volumetric flow rate at standard conditions according to DIN ISO 2533:1979-12.

PHYSICAL DIMENSIONS

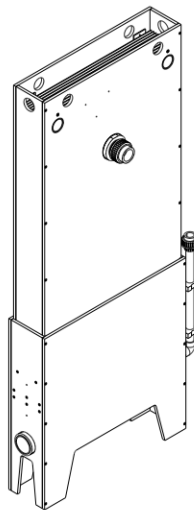

Dry Weight	45 kg (99 lb)
Wet Weight without Solids	55 kg (121 lb)
Maximum Load for Lifting^b	100 kg (220 lb)
Length	280 mm (0.9 ft)
Width	747 mm (2.5 ft)
Height	1515 mm (5 ft)
Filtration Tank Minimal Water Level	1670 mm (5.5 ft)
Connection for Permeate	DN32, loose joint
Connection for Aeration	DN20, loose joint

^b Sludge deposit must be removed before lifting unit

IMPORTANT INFORMATION

Storage & Handling:

MICRODYN BIO-CEL MBR modules must be handled and stored appropriately to ensure proper operation and to prevent membrane damage. Please see MICRODYN BIO-CEL® MBR – Storage Conditions (TB-WW002).

MICRODYN-NADIR reserves the right to change specifications without prior notification.

Contact

Europe

Germany: +49 611 962 6001
 Italy: +39 0721 1796201
 info@microdyn-nadir.com

Americas

USA: +1 805 964 8003
 sales.mnus@microdyn-nadir.com

Asia

Singapore: +65 6457 7533
 China: +86 10 8413 9860
 waterchina@mann-hummel.com