

MICRODYN *iSep*™ 500 Ultrafiltration Modules

MICRODYN *iSep*™ 500 ultrafiltration (UF) modules feature a vacuum-driven, backwashable, spiral-wound membrane design to handle high fouling water and wastewater streams. With open feed channels and an integrated tank design, *iSep* modules can handle significantly higher solids than many standard polymeric UF modules on the market today. MICRODYN *iSep* modules consistently deliver high-quality permeate regardless of feed conditions with the additional benefits of reduced footprint, higher membrane area, integrated aeration, and the ability to drain solids from the modules between backwashes quickly.

Extensive pre-treatment for UF systems, such as clarifiers, adds significant and unnecessary cost, footprint, and complexity. With the ability to treat some of the most difficult water and wastewater streams directly, *iSep* can drastically reduce capital and operational costs while simplifying the overall treatment process.

MEMBRANE CHARACTERISTICS

Membrane Chemistry	PVDF (Polyvinylidene Fluoride) and Polyethersulfone (PES) options available
Construction	Submerged, Negative Pressure Ultrafiltration Module
Pore Size	0.03 micron

MODULE SPECIFICATIONS

Models	MICRODYN <i>iSep</i> ™ 500-PVDF MICRODYN <i>iSep</i> ™ 500-PES
Feed Channel	90 mil corrugated
Membrane Area - m² (ft²)	27.4 (295)

OPERATING PARAMETERS


Transmembrane Pressure Range	0.07 – 0.7 bar (1 – 10 psi)
Temperature Range¹	1 – 45°C (34 – 113°F)
pH Range¹	2.0 – 11.0
Applicable Air Scour Rate	5.6 Nm ³ /hr (3.5 scfm)
Cleaning Chlorine Tolerance	PVDF model: 2,000 mg/L PES model: 1,000 mg/L
Maximum Feed TSS²	1,000 mg/L
Maximum Feed Oil & Grease²	100 mg/L

¹ Temperature, pH limits, and cleaning procedures are further detailed in the MICRODYN *iSep*™ 500 Product Manual.

² Depending on feed water quality and operating conditions.



PHYSICAL DIMENSIONS

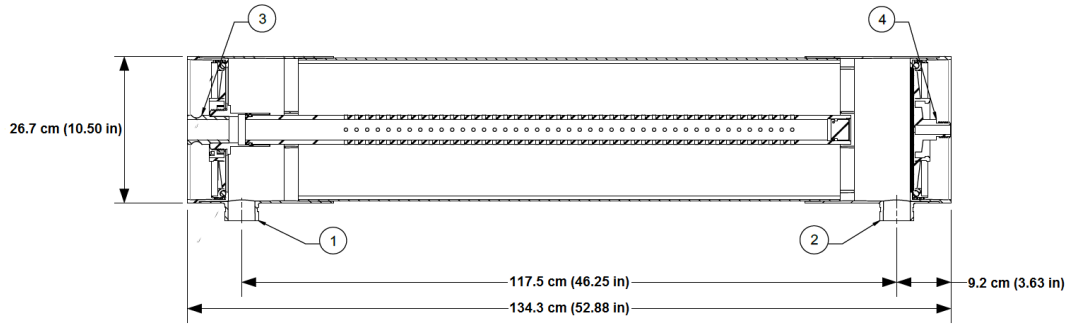

Item 1	Overflow	2.0" Grooved End Coupling
Item 2	Feed/Drain	2.0" Grooved End Coupling
Item 3	Permeate	1.5" Cam & Groove Coupling
Item 4	Air	0.75" MNPT
Dry Module Weight - kg (lb)	23 (50)	

IMPORTANT INFORMATION

- Start-up:** MICRODYN-NADIR recommends an operational sequence that incorporates permeate production, cleaning, and module draining steps. For a more detailed operational sequence, please see the MICRODYN *i*Sep™ 500 Product Manual pages 10-11.
- Cleaning:** *i*Sep ultrafiltration modules must be cleaned routinely via backwash, chemically enhanced backwash (CEB), and clean-in-place (CIP) to ensure proper operation and to prevent membrane damage. Please see the MICRODYN *i*Sep 500 Product Manual pages 12-15.
- Storage:** *i*Sep ultrafiltration modules must be stored appropriately to ensure proper operation and to prevent membrane damage. Please see the MICRODYN *i*Sep 500 Product Manual pages 18-19.

CUSTOMIZABLE SPECIALTY ELEMENTS

MICRODYN-NADIR offers a full range of membranes and element designs for challenging water and process applications. Technologies include low-fouling RO, submerged UF, continuous high temperature, ultra-high pressure, unique sanitary designs, and more. Contact MICRODYN-NADIR to customize a product that satisfies your specific requirements.

Contact

Europe
 Germany: +49 611 962 6001
 Italy: +39 0721 1796201
 info@microdyn-nadir.com

Americas
 USA: +1 805 964 8003
 sales.mnus@microdyn-nadir.com

Asia
 Singapore: +65 6457 7533
 China: +86 10 8413 9860
 waterchina@mann-hummel.com