

SEPRODYN® SE 020 TP 1N

Crossflow Microfiltration Modules

SEPRODYN® crossflow microfiltration modules are used to separate suspended solids larger than 1.0 micron. The highly porous polyethylene membrane is backwashable, allowing for stable and efficient filtration with continuously high product flux. The smart construction techniques employed in the module manufacture allow them to be used in applications which require highly stable polymer materials, pH stability (0 to 14), and high resistance against abrasive substances. Feed streams with a high solids content are no problem for SEPRODYN® due to the self-supporting and extremely robust tubular membranes with a large inner diameter of 5.5 mm. These tubular membranes are made of ultra-high molecular weight polyethylene, in a process patented by MICRODYN-NADIR.

MEMBRANE CHARACTERISTICS

Membrane Material	Polyethylene (PE)
Membrane Tube Inner Diameter	5.5 mm (0.2 inches)
Nominal Pore Size	1.0 µm


MODULE SPECIFICATIONS

Housing Material	Polypropylene (PP)
Sealing Material	EPDM
Number of Tubes	46
Nominal Membrane Area	0.01 m ² (0.1 ft ²)
Free Flow Area	0.2 cm ²

OPERATING PARAMETERS

Temperature Range	5 - 40°C (41 - 104°F)
Maximum TMP - Inside to Outside	3.0 bar (43.5 psi) at 25°C (77°F) 2.0 bar (29.0 psi) at 40 °C (104 °F)
Maximum Backpulse Pressure above Outlet Pressure	2.0 bar (29.0 psi) at 25°C (77°F) 1.5 bar (21.8 psi) at 40°C (104°F)
Feed Flow Rate at Axial Velocity of 1 m/s	71 l/h
pH Range	0 - 14
Housing Maximum Pressure	3.0 bar (43.5 psi)

PHYSICAL DIMENSIONS

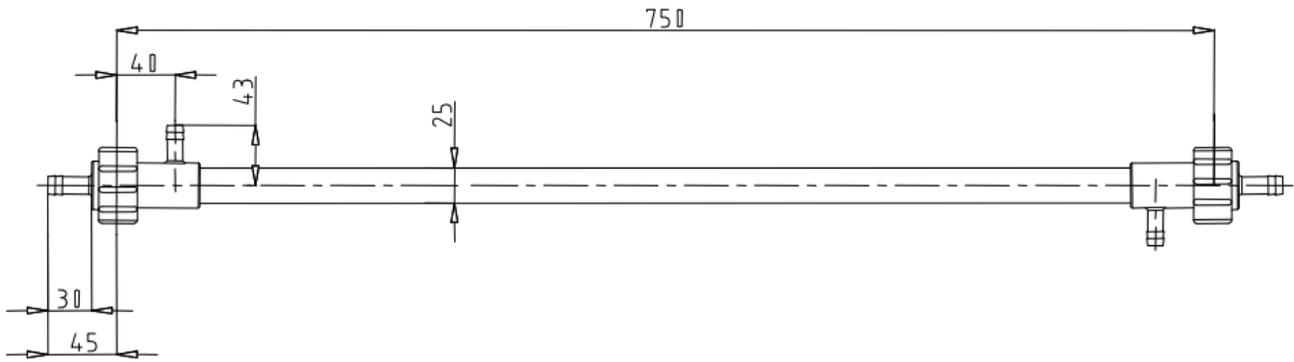

all dimensions in mm

Length	750 mm (29.5 inches)
Diameter	25 mm (1.0 inches)
Connection for Concentrate	Hose Nozzle, diameter 12 mm (0.5 inches)
Connection for Permeate	Hose Nozzle, diameter 10 mm (0.4 inches)

IMPORTANT INFORMATION

Storage & Handling: SEPRODYN® Tubular Modules must be handled and stored appropriately to ensure proper operation and to prevent membrane damage. Please see SEPRODYN® Tubular Modules – User Manual and SEPRODYN® Tubular Modules – Handling Instructions.

MICRODYN-NADIR reserves the right to change specifications without prior notification.

Contact

Europe
 Germany: +49 611 962 6001
 Italy: +39 0721 1796201
 info@microdyn-nadir.com

Americas
 USA: +1 805 964 8003
 sales.mnus@microdyn-nadir.com

Asia
 Singapore: +65 6457 7533
 China: +86 10 8413 9860
 waterchina@mann-hummel.com