



# TurboClean® High Purity Low Fouling RO Elements

TurboClean® High Purity X-20™ low fouling RO elements are used in applications which demand ultrapure water such as dialysis, pharmaceutical and semiconductor rinse water. X-20 membrane does not lose its low fouling characteristics over time like coated “fouling resistant” membranes. These sanitary elements combine X-20 membrane’s proprietary formulation with the unique, patented TurboClean hard-shell construction to offer better value than other sanitary elements. TurboClean elements feature about 60% less bypass flow than net-wrapped elements resulting in:

- Strongest Sanitary Element
- Most Effective Cleaning and Sanitizing
- Lower Effective Recovery
- Energy Savings
- Less Scaling
- Ease of Installation

## MEMBRANE CHARACTERISTICS

<b>Membrane</b>	X-20™
<b>Membrane Type</b>	Low-Fouling Polyamide
<b>Stabilized Salt Rejection (%)</b>	99.5
<b>Minimum Salt Rejection (%)</b>	99.0

## DESIGN INFORMATION

Model	Part Number	Permeate Flow m <sup>3</sup> /day (GPD) <sup>a</sup>	Membrane Area m <sup>2</sup> (ft <sup>2</sup> )	Feed Spacer Thickness (mil) <sup>b</sup>
TurboClean® HP 4040-X20-M	164139441	9.1 (2,400)	7.4 (80)	31
TurboClean® HP 4040-X20-F	194030442	9.1 (2,400)	7.4 (80)	31
TurboClean® HP 8040-X20	194040841	34.8 (9,200)	33.0 (355)	31

a Test conditions: 2,000 ppm NaCl, 15.5 bar (225 psi), 25°C (77°F), 15% recovery, pH 8.0, 30 minutes operation. Flow rates will be no more than 15% below the values shown. Product specifications may change without notice as design revisions occur.

b All models on this sheet have TurboClean sanitary outer wrap and diamond shaped feed spacers. All models on this sheet include anti-telescoping devices (ATDs) attached to the ends of the element and one interconnector. A brine seal is not included and is not required.

## OPERATING PARAMETERS

<b>Maximum Operating Pressure</b>	41 bar (600 psi)
<b>Maximum Operating Temperature</b>	50°C (122°F)
<b>Cleaning pH Range<sup>1</sup></b>	1.0 - 12.0
<b>Chlorine Tolerance<sup>2</sup></b>	< 0.1 ppm
<b>Maximum Pressure Drop</b>	1.4 bar (20 psi) per element; 6 bar (80 psi) per housing
<b>Maximum SDI<sub>15</sub></b>	5.0
<b>Maximum Turbidity</b>	1 NTU

<sup>1</sup> Refer to temperature and pH limits in Membrane Cleaning Guide - Water Application Elements (TSG-C-001).

<sup>2</sup> Pretreatment is recommended for the removal of free chlorine and other oxidizing agents to prevent damage to membranes. Oxidizing agents, such as free chlorine, in contact with polyamide membranes may result in shortened operating life or membrane failure. Such oxidation damage is excluded from warranty. Refer to Membrane Operating Guide - Recommendations for Water Purification (TSG-O-012).


PHYSICAL DIMENSIONS

Model	Element Weight kg (lb) <sup>c</sup>	Dim. A mm (inches)	Dim. B mm (inches)	Dim. C <sup>d</sup> mm (inches)	Permeate Tube <sup>e</sup>
TurboClean® HP 4040-X20-M	4 (9)	1,016 (40.0)	99 (3.9)	19.1 (0.75)	Male
TurboClean® HP 4040-X20-F	4 (9)	1,016 (40.0)	99 (3.9)	15.9 (0.625)	Female
TurboClean® HP 8040-X20	16 (36)	1,016 (40.0)	201 (7.9)	28.6 (1.125)	Female

<sup>c</sup> Shipping weight is dependent on packaging material and quantity shipped.

<sup>d</sup> Diameters for Dimension "C" are as follows. For Female elements, "C" is the Inner Diameter. For Male elements, "C" is the Outer Diameter.

<sup>e</sup> Male elements have a protruding permeate tube, indicated as "D" in the diagram. Dimension "D" is 25.4 mm (1.0 in).

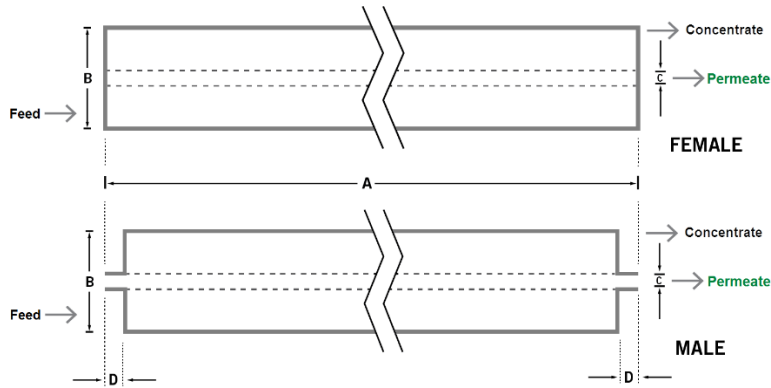

IMPORTANT INFORMATION

- Start-up:** MICRODYN-NADIR recommends flushing elements for 30 minutes at low pressure and discarding permeate during the flush prior to operation. For a more detailed start-up procedure, please see Element Start-Up Guide - System Start-Up (TSG-O-005).
- Cleaning:** TurboClean® membrane elements must be cleaned periodically to ensure proper operation and to prevent membrane damage. Please see Membrane Cleaning Guide - Water Application Elements (TSG-C-001).
- Storage:** TurboClean membrane elements must be stored appropriately to ensure proper operation and to prevent membrane damage. Please see Element Storage Guides (TSG-O-009 & TSG-O-010).
- Regulatory:** All models on this sheet use FDA (CFR Title 21) compliant materials.

CUSTOMIZABLE SPECIALTY ELEMENTS

MICRODYN-NADIR offers a full range of membranes and element designs for challenging water and process applications. Technologies include low-fouling RO, submerged UF, continuous high temperature, ultra-high pressure, unique sanitary designs and more. Contact MICRODYN-NADIR to customize a product that satisfies your specific requirements.

Contact

**Europe**  
 Germany: +49 611 962 6001  
 Italy: +39 0721 1796201  
 info@microdyn-nadir.com

**Americas**  
 USA: +1 805 964 8003  
 sales.mnus@microdyn-nadir.com

**Asia**  
 Singapore: +65 6457 7533  
 China: +86 10 8413 9860  
 waterchina@mann-hummel.com