


SPIRA-CEL[®] Data Sheet

- Modules for Ultrafiltration -

FY-UV200-7533 Series

Modules for Ultrafiltration of Electrocoat Paint

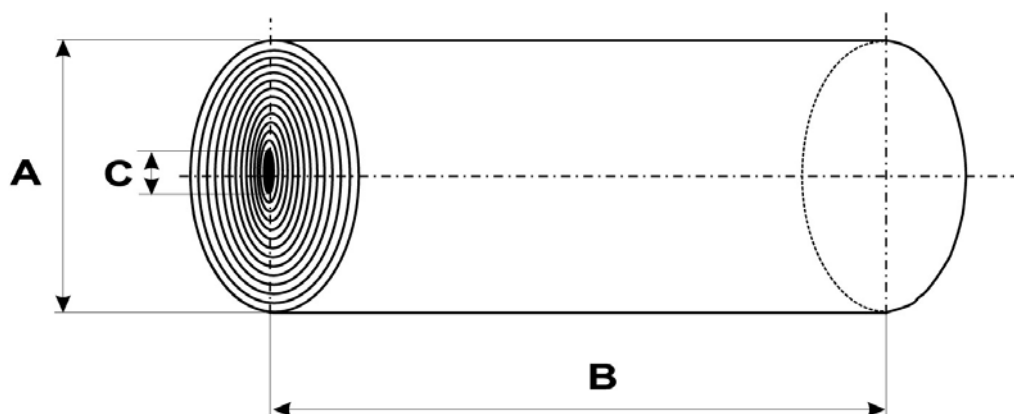

| Module | | | | | Membrane | |
|-----------|----|------------------|---------------|------------------------|-----------------------|-------|
| | | A | B | C | | |
| | | Ø Outside Module | Length Module | Ø Inside Permeate tube | Regular membrane type | UV200 |
| Dimension | mm | 190 | 838 | 28.9 | Membrane material | PVDF |
| Tolerance | mm | +0 / -2 | +1 / -2 | ± 0.1 | Nom. MWCO (kDa) | 200 |

| Module specs & data | | | |
|--------------------------------|--|----------------|----------|
| Spacer thickness, diamond type | | mil / mm | 31 / 0.8 |
| Membrane area | | m ² | 26.0 |
| Outer wrap | | Spacer wrap | |

| Recommended operating conditions | | | |
|----------------------------------|--|-------------------|------|
| Prefiltration | | µm | ≤ 25 |
| Crossflow, min. ¹⁾ | | m ³ /h | 17 |
| Feed pressure | | bar | 2.8 |
| Retentate pressure | | bar | 1.0 |
| Permeate pressure | | bar | 0 |

| Allowable operating conditions | | | |
|--|--|-----|----------|
| Feed pressure, max. | | bar | 10 |
| Retentate pressure, min. | | bar | 0.7 |
| Permeate pressure, max. | | bar | 0.25 |
| Cleaning pressure, max. | | bar | 3 |
| Pressure loss, max. (Δp _{max}) | | bar | 2.1 |
| Processing temperature | | °C | 5 - 50 |
| pH range during processing | | | 2.5 - 11 |

¹⁾ Please adjust the cross-flow if you use an ATD without lip-seal.

Note:

This module-type is preserved with an isopropanol solution.

Not all combinations are available. Please do not hesitate to contact MICRODYN-NADIR for any further information.

MICRODYN-NADIR behält sich das Recht vor, Angaben ohne vorherige Ankündigung anzupassen.
We reserve the right to change specifications without prior notification.

MICRODYN-NADIR GmbH
Industriepark Kalle-Albert
Rheingaustraße 190 – 196
D-65203 Wiesbaden

Telefon: +49 (0) 611/962-6001
Telefax: +49 (0) 611/962-9237
E-Mail: info@microdyn-nadir.de
Internet: www.microdyn-nadir.de



SPIRA-CEL[®] Data Sheet

- Modules for Ultrafiltration -

FY-UV200-7533 Series

Changes:

The here printed values may be subject to changes. Presently valid are the values on the data sheet shown on web site www.microdyn-nadir.com.

Tolerances:

The tolerances indicated on our data sheets are composed to the best of our knowledge.

Warranty:

Stated warranties are valid if values on this data sheet are followed during use of the module(s) only. Also rules for installation, cleaning, water and preservation have to adhered to and log registered made available for MICRODYN-NADIR on request. MICRODYN-NADIR approved cleaning detergent, anti-foam, polymers, other chemicals and filter-aids lubricants can be applied only.

First Cleaning:

MICRODYN-NADIR modules may be put into production after having gone through the first cleaning prescribed by MICRODYN-NADIR on product packing notes or given differently by MICRODYN-NADIR.

MICRODYN-NADIR behält sich das Recht vor,
Angaben ohne vorherige Ankündigung
anzupassen.
We reserve the right to change specifications
without prior notification.

MICRODYN-NADIR GmbH
Industriepark Kalle-Albert
Rheingaustraße 190 – 196
D-65203 Wiesbaden

Telefon: +49 (0) 611/962-6001
Telefax: +49 (0) 611/962-9237
E-Mail: info@microdyn-nadir.de
Internet: www.microdyn-nadir.de

