


SPIRA-CEL[®] Data Sheet

- Modules for Ultrafiltration -

EY-UV200-8040 Series

Modules for Ultrafiltration of Electrocoat Paint

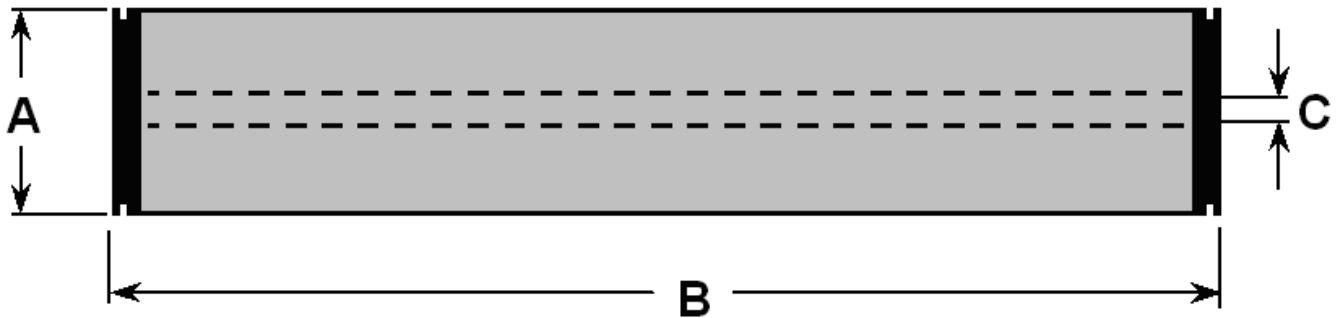

Module					Membrane	
		A	B	C		
		Ø Outside Module	Length Module	Ø Inside Permeate tube	Regular membrane type	UV200
Dimension	mm	200.5	1016	30.15	Membrane material	PVDF
Tolerance	mm	+0 / -2	+1 / -3	± 0.1	Nom. MWCO (kDa)	200

Module specs & data				
Spacer thickness, diamond type			mil / mm	31 / 0.8 44 / 1.1
Membrane area			m ²	32.0 25.0
Outer wrap				FRP shell

Recommended operating conditions				
Prefiltration		µm	≤ 25	≤ 50
Crossflow, min.		m ³ /h	18	22
Feed pressure		bar	2.8	2.8
Retentate pressure		bar	1.0	1.0
Permeate pressure		bar	0	0

Allowable operating conditions				
Feed pressure, max.		bar	10	10
Retentate pressure, min.		bar	0.7	0.7
Permeate pressure, max.		bar	0.25	0.25
Cleaning pressure, max.		bar	3	3
Pressure loss, max. (Δp _{max})		bar	2.1	2.1
Processing temperature		°C	5 - 50	5 - 50
pH range during processing			2.5 - 11	2.5 - 11

Note:

All modules from EY-Series will be delivered with attached ATD.
 This module-type is preserved with an isopropanol solution.
 Not all combinations are available. Please do not hesitate to contact MICRODYN-NADIR for any further information.

MICRODYN-NADIR behält sich das Recht vor, Angaben ohne vorherige Ankündigung anzupassen.
 We reserve the right to change specifications without prior notification.

MICRODYN-NADIR GmbH
 Industriepark Kalle-Albert
 Rheingaustraße 190 – 196
 D-65203 Wiesbaden

Telefon: +49 (0) 611/962-6001
 Telefax: +49 (0) 611/962-9237
 E-Mail: info@microdyn-nadir.de
 Internet: www.microdyn-nadir.de



SPIRA-CEL[®] Data Sheet

- Modules for Ultrafiltration -

EY-UV200-8040 Series

Changes:

The here printed values may be subject to changes. Presently valid are the values on the data sheet shown on web site www.microdyn-nadir.com.

Tolerances:

The tolerances indicated on our data sheets are composed to the best of our knowledge.

Warranty:

Stated warranties are valid if values on this data sheet are followed during use of the module(s) only. Also rules for installation, cleaning, water and preservation have to adhered to and log registered made available for MICRODYN-NADIR on request. MICRODYN-NADIR approved cleaning detergent, anti-foam, polymers, other chemicals and filter-aids lubricants can be applied only.

First Cleaning:

MICRODYN-NADIR modules may be put into production after having gone through the first cleaning prescribed by MICRODYN-NADIR on product packing notes or given differently by MICRODYN-NADIR.

MICRODYN-NADIR behält sich das Recht vor,
Angaben ohne vorherige Ankündigung
anzupassen.
We reserve the right to change specifications
without prior notification.

MICRODYN-NADIR GmbH
Industriepark Kalle-Albert
Rheingaustraße 190 – 196
D-65203 Wiesbaden

Telefon: +49 (0) 611/962-6001
Telefax: +49 (0) 611/962-9237
E-Mail: info@microdyn-nadir.de
Internet: www.microdyn-nadir.de

