


SPIRA-CEL[®] Data Sheet

- Modules for Nanofiltration -

GY-NP-8040 Series

Modules for Environmental and Industrial Applications

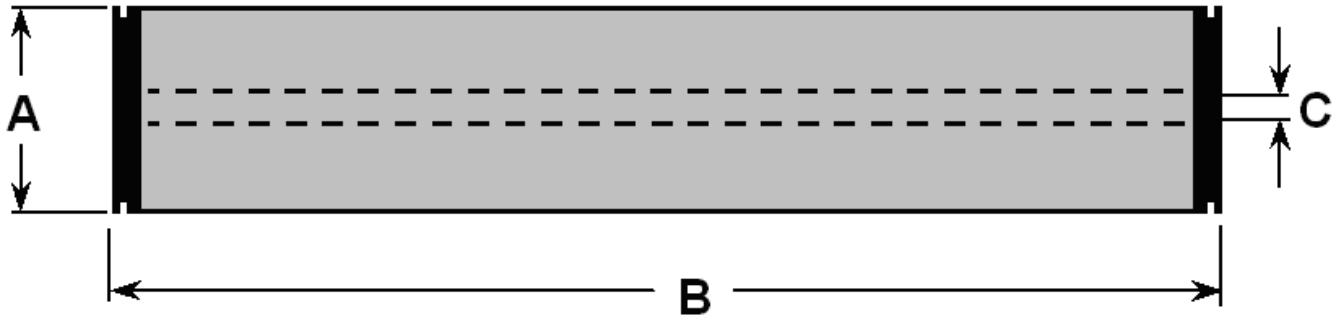

Module				Membrane		
	A	B	C	NADIR [®] membrane type	NP010	NP030
	Ø Outside Module	Length Module	Ø Inside Permeate tube	Membrane material	PES	PES
Dimension	mm	200.5	1016			
Tolerance	mm	+0 / -2	+1 / -3			

Module specs & data		
Spacer thickness, parallel type		mil / mm
Membrane area		m ²
Outer wrap		FRP shell

Recommended operating conditions		
Prefiltration		µm
Cross flow ⁽¹⁾		m ³ /h
Permeate pressure		bar

Allowable operating conditions		
Feed pressure, max.		bar
Retentate pressure, min.		bar
Transmembrane pressure, max.		bar
Permeate pressure, max.		bar
Pressure loss per module, max. (Δp _{max}), 5 - 50 °C		bar
Pressure loss per module, max. (Δp _{max}), 50 - 65 °C		bar
Pressure loss per module, max. (Δp _{max}), 65 - 80 °C		bar
Pressure loss per housing, max. at 80 °C		bar
Processing temperature		°C
pH range during filtration		
pH range during CIP		

⁽¹⁾ for water at 25 °C

Note:

All modules from GY-Series will be delivered with attached ATDs.
Not all combinations are available. Please do not hesitate to contact MICRODYN-NADIR for any further information.

MICRODYN-NADIR behält sich das Recht vor, Angaben ohne vorherige Ankündigung anzupassen.
We reserve the right to change specifications without prior notification.

MICRODYN-NADIR GmbH
Industriepark Kalle-Albert
Rheingaustraße 190 – 196
D-65203 Wiesbaden

Telefon: +49 (0) 611/962-6001
Telefax: +49 (0) 611/962-9237
E-Mail: info@microdyn-nadir.de
Internet: www.microdyn-nadir.de



SPIRA-CEL[®] Data Sheet

- Modules for Nanofiltration -

GY-NP-8040 Series

Changes:

The here printed values may be subject to changes. Presently valid are the values on the data sheet shown on web site www.microdyn-nadir.com.

Tolerances:

The tolerances indicated on our data sheets are composed to the best of our knowledge.

Warranty:

Stated warranties are valid if values on this data sheet are followed during use of the module(s) only. Also rules for installation, cleaning, water and preservation have to adhered to and log registered made available for MICRODYN-NADIR on request. MICRODYN-NADIR approved cleaning detergent, anti-foam, polymers, other chemicals and filter-aids lubricants can be applied only.

First Cleaning:

MICRODYN-NADIR modules may be put into production after having gone through the first cleaning prescribed by MICRODYN-NADIR on product packing notes or given differently by MICRODYN-NADIR.

MICRODYN-NADIR behält sich das Recht vor,
Angaben ohne vorherige Ankündigung
anzupassen.
We reserve the right to change specifications
without prior notification.

MICRODYN-NADIR GmbH
Industriepark Kalle-Albert
Rheingaustraße 190 – 196
D-65203 Wiesbaden

Telefon: +49 (0) 611/962-6001
Telefax: +49 (0) 611/962-9237
E-Mail: info@microdyn-nadir.de
Internet: www.microdyn-nadir.de

