


ULTRADYN PRODUCTS SPECIFICATION

- HOLLOW FIBER UF MEMBRANE MODULE -

FN20-VP-FUC1582

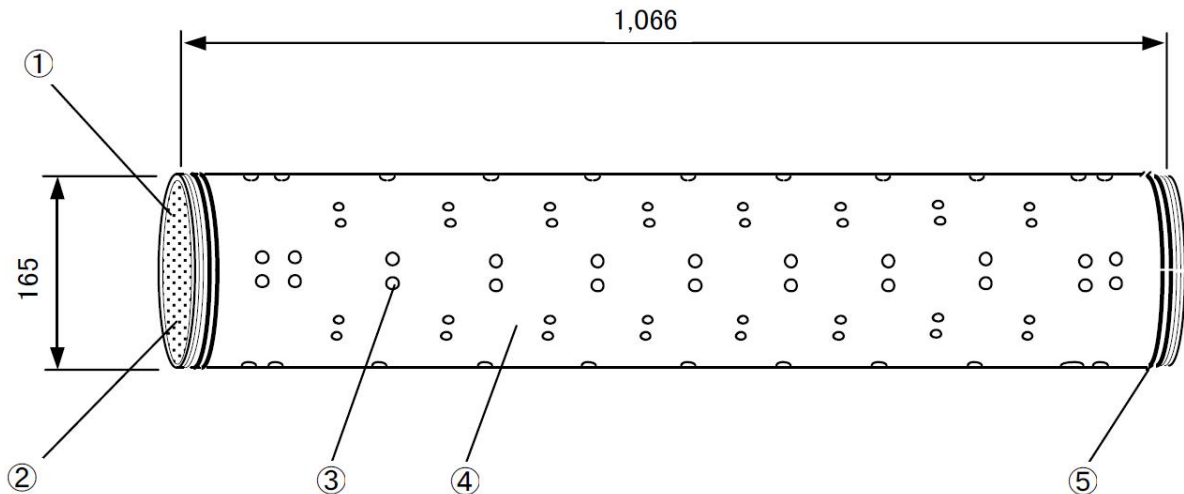

Module components

Article	Name	Material	Num.
①	Hollow Fiber	Cellulose Acetate	-
②	Potting Resin	Polyurethane	-
③	Inner Net	Nylon	1
④	Cartridge Case	Polyvinyl chloride	1
⑤	O-Ring Type WG-36	EPM	4

EPM: Ethylene Propylene Rubber

Standard configurations

Filtration type	Ultrafiltration	
Membrane material	Cellulose acetate	
Molecular cutoff	150,000	Dalton
Hollow fiber inner diameter	0.8	mm
Membrane area	16.0	m ²
Standard water flux ⁽¹⁾	9.8	m ³ /h
Shipping water flux range ⁽¹⁾	7.5	m ³ /h
Transmembrane pressure, max.	0.2	MPa
Temperature, max.	40	°C
Applicable pH range	4 ~ 8	
Standard inlet feed flow ⁽²⁾	3.5	m ³ /h
Weight at operation	23	kg
Weight at shipping	16	kg
Standard preservative	2% Formalin	

⁽¹⁾ Initial water flux by dead end filtration with pure water under T.M.P. 0.1 MPa at 25°C

⁽²⁾ Standard condition is popular one for surface water treatment under fixing water flux to 1.5 m³/h. Please notice that the optimum velocity is different for each application.

Note: It should be avoided to operate higher water flux over 24 m³/h for this module type.

Stainless steel housing set is provided separately.

DAICEN Membrane Systems Ltd. is the manufacturer of the ULTRADYN modules and markets and distributes them under the registered trademark MOLSEP®.

MICRODYN-NADIR behält sich das Recht vor, Angaben ohne vorherige Ankündigung anzupassen.
We reserve the right to change specifications without prior notification.

MICRODYN-NADIR GmbH
Industriepark Kalle-Albert
Kasteler Straße 45
D-65203 Wiesbaden

Telefon: +49 (0) 611/962-6001
Telefax: +49 (0) 611/962-9237
E-Mail: info@microdyn-nadir.de
Internet: www.microdyn-nadir.de

